

FLEXICAB

Flexicab is a high security cable seal designed for demanding logistics and industrial use. Its lightweight aluminum body resists corrosion, while the steel cable with a welded tip ensures easy locking and strong tamper resistance. A key feature is its fraying mechanism, which causes the cable to splay when cut, making tampering clearly visible and re-locking impossible. FLEXICAB supports custom laser markings including name, logo and sequential numbering for full traceability, making it ideal for securing high value assets in transport, oil tankers, and related sectors.

Material

- ◆ Body – Aluminum
- ◆ Cable – Steel Cable

Printing & Marking

- ◆ Laser
- ◆ Name / Logo
- ◆ Sequential Numbering


Applications

- ◆ Container / Trucks
- ◆ Refineries
- ◆ Oil Tankers


Properties

- ◆ Average Breaking Strength : Various
- ◆ Temperature : - 40°C to 110°C

Colours

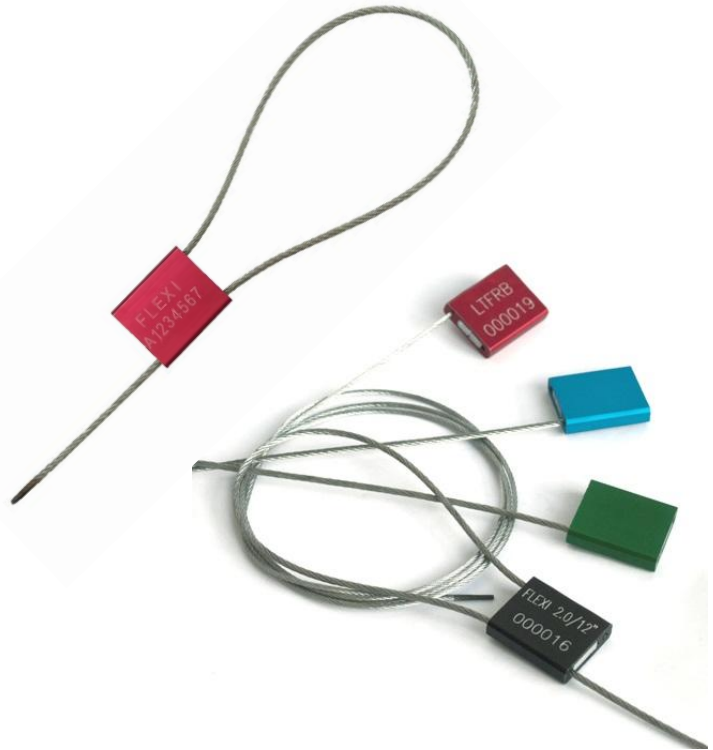

Product Code	Dimension					Packaging				
	Total Length TOL (mm)	Working Length WL (mm)	Strap Diameter Ø (mm)	Tag Length TL (mm)	Tag Width TW (mm)	Quantity per mat (pieces)	Inner Packing (pieces)	Quantity per box (pieces)	Weight per box (kg)	Box Dimension L x W x H (mm)
FLEXI 1.5 x 300	330	300	1.5	26	22	In Loose	100	500	7	380 x 295 x 130
FLEXI 2.0 x 200	230	200	2.0	26	22	In Loose	100	500	7.5	480 x 187 x 134
FLEXI 2.0 x 300	330	300	2.0	26	22	In Loose	100	500	8.5	480 x 187 x 134

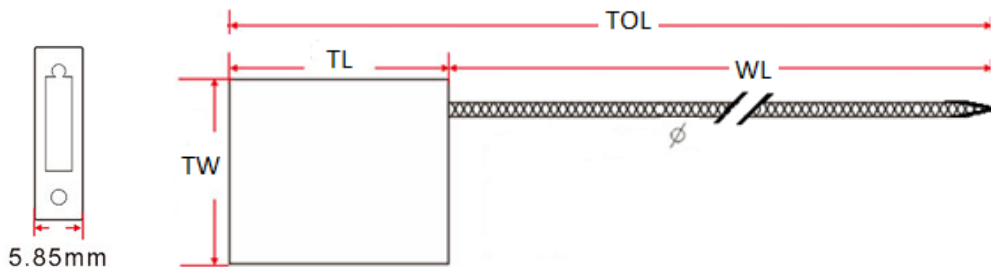

FLEXICAB

Flexicab is a high security cable seal designed for demanding logistics and industrial use. Its lightweight aluminum body resists corrosion, while the steel cable with a welded tip ensures easy locking and strong tamper resistance. A key feature is its fraying mechanism, which causes the cable to splay when cut, making tampering clearly visible and re-locking impossible. FLEXICAB supports custom laser markings including name, logo and sequential numbering for full traceability, making it ideal for securing high value assets in transport, oil tankers, and related sectors.

Material

- ◆ Body – Aluminium
- ◆ Cable – Steel Cable

Printing & Marking

- ◆ Laser
- ◆ Name / Logo
- ◆ Sequential Numbering


Applications

- ◆ Container / Trucks
- ◆ Refineries
- ◆ Oil Tankers

Properties

- ◆ Average Breaking Strength : Various
- ◆ Temperature : - 40°C to 110°C

Colours

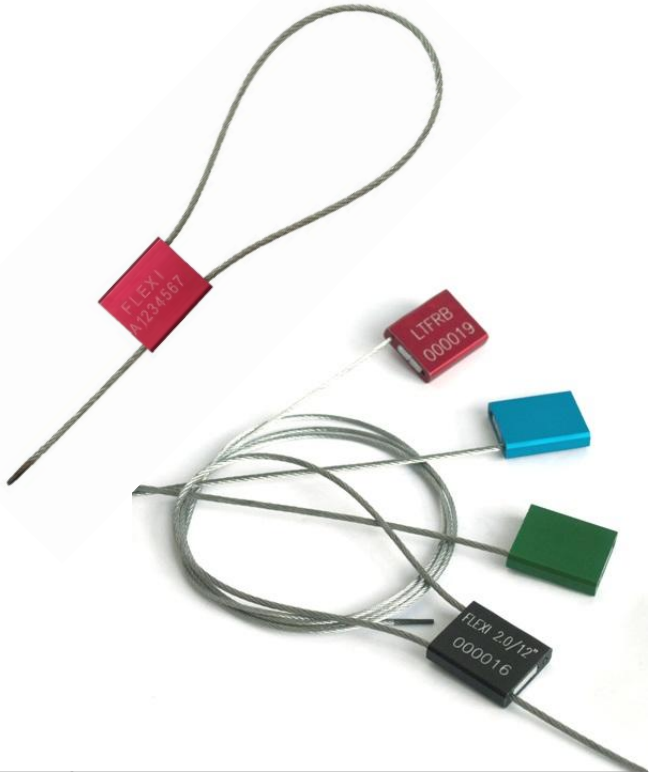

Product Code	Dimension					Packaging				
	Total Length TOL (mm)	Working Length WL (mm)	Strap Diameter Ø (mm)	Tag Length TL (mm)	Tag Width TW (mm)	Quantity per mat (pieces)	Inner Packing (pieces)	Quantity per box (pieces)	Weight per box (kg)	Box Dimension L x W x H (mm)
FLEXI 2.5 x 300	350	300	2.5	25	25	In Loose	100	500	10.8	400 x 215 x 150
FLEXI 3.0 x 300	350	300	3.0	25	25	In Loose	100	500		
FLEXI 3.5 x 250	300	250	3.5	25	25	In Loose	100	500	13.25	490 x 190 x 140

